

Date _____
 Sales Representative _____
 Name _____
 Address _____
 City _____ State _____ Zip _____
 Phone _____ Fax _____
 Email _____

Account Number _____
 Projected Close Date _____
 Purchase Order Number _____
 Ship To Address _____

Contact _____
 Phone _____

Application: Residential - Single Family Home
 Commercial

Opportunity Reference / Project Name _____

Quote Order
 Shipping Method:
 Pick-up Common Carrier
 Lift Gate Required

Model

- CPL400 - (53" max) Unit enclosed by others
- CPL600 - (77" max)
- CPL800 - (101" max)
- CPL1000 - (125" max)
- CPL1200 - (149" max)
- CPL1400 - (171" max)

Exact Lifting Height _____ inches (measured from top landing to floor). *Note: measure from inside pit*

Middle Lifting Height _____ inches (For 3-Stop Orders)

Ramps

- CPL065 - Auto-Folding
- Fixed Ramp - (Standard on CPL models)
- Unit will be in a 3" pit


Platform Configuration

- Straight Through (Standard 36" x 54")
- CPL050 - 36" x 48" Platform
- CPL051 - 36" x 60" Platform
- VPL3654 - 36" clear x 54" Platform
- CPL052 - 42" x 60" Platform
- CPL058 - 42" x 54" Platform
- CPL054* - Enter/Exit Same Side
- CPL053 - 36" x 54" 90° Exit Platform (L/R Enter/Exit)
- CPL057 - 36" x 60" 90° Exit Platform (L/R Enter/Exit)
- CPL059 - 42" x 54" 90° Exit Platform (L/R Enter/Exit)
- CPL055 - 42" x 60" 90° Exit Platform (L/R Enter/Exit)

* Not available for lift heights under 8'

Tower Orientation

- Left Hand Right Hand

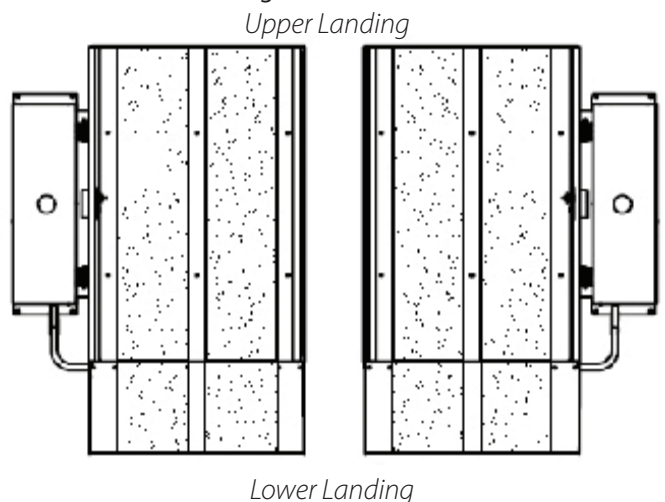

Drive Power **Power Supply**

- AC Power (Standard) 120v.....60 hz
- DC Power CPL030 (Includes Batteries)

Controls

- PL016 - Call/Send Control (Each)- Quantity _____
- PL017 - Wireless Call/Send Controls (pair) (N/A in Gate Frame)
- CPL015 - Key Lock Upgrade for Control - Quantity _____
- CPL021 - 3 Stop Control Package with E-Stop Alarm (Includes 3 call only controls)
- CPL011 - Emergency Stop Alarm and Lighted button

Top Landing Gates

- CPL002L - Top Landing Gate w/ EMI Interlock and Call/Send - 36" Wide - LH
- CPL002R - 36" Top Landing Gate w/ EMI Interlock and Call/Send - RH
- CPL003L - 36" Top Landing Gate w/ EMI Interlock - LH
- CPL003R - 36" Top Landing Gate w/ EMI Interlock - RH
- CPL006L - Top Landing Gate w/ EMI Interlock and Call/Send - 42" Wide - LH
- CPL006R - Top Landing Gate w/ EMI Interlock and Call/Send - 42" Wide - RH
- CPL007L - Top Landing Gate w/ EMI Interlock 42" Wide - LH
- CPL007R - Top Landing Gate w/ EMI Interlock 42" Wide - RH

Platform Gates

- CPL004L - Platform Gate w/ EMI Interlock - 36" Wide - LH
- CPL004R - Platform Gate w/ EMI Interlock - 36" Wide - RH
- CPL077L - Platform Gate w/ EMI Interlock - 42" Wide - LH
- CPL077R - Platform Gate w/ EMI Interlock - 42" Wide - RH
- CPL090L - Platform Gate w/ EMI Interlock for 90° Platform - LH
- CPL090R - Platform Gate w/ EMI Interlock for 90° Platform - RH


Note Commercial Application

Platform gate only allowed on max lift height of 60"
by ASME A18.1 - Section 2.1.3, (Rule 2.7)


Hoistway Doors

- CPL005L 36" Fire-rated Flush Hoistway Door w/ EMI Interlock - LH Top Middle Bottom
- CPL005R 36" Fire-rated Flush Hoistway Door w/ EMI Interlock - RH Top Middle Bottom
- CPL005L-ES 36" Fire-Rated Flush Hoistway Door w/ Electric Strike - LH Top Middle Bottom
- CPL005R-ES 36" Fire-Rated Flush Hoistway Door w/ Electric Strike - RH Top Middle Bottom


Top Landing Gate/Door Swing

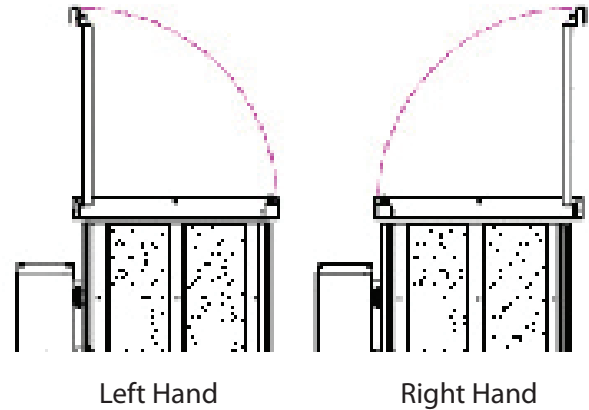

Platform Gate/Swing

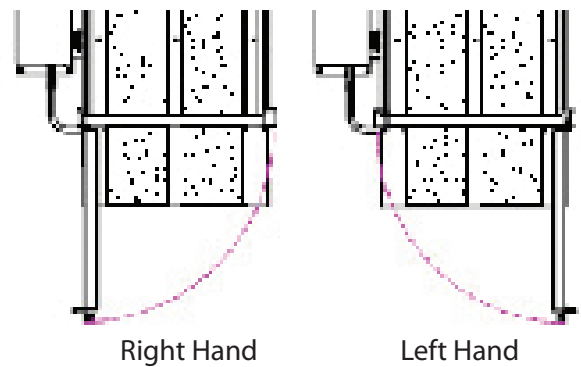


Landing Door Swing

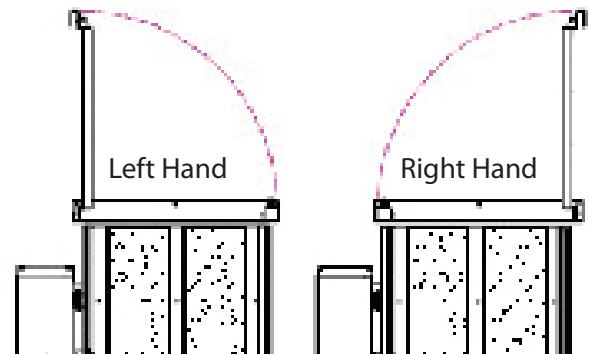

Hoistway Doors (con't)

- CPL042L - 42" Fire Door w/ EMI Interlock - LH
 - Top Middle Bottom
- CPL042R - 42" Fire Door w/ EMI Interlock - RH
 - Top Middle Bottom
- CPL042L-ES 42" Fire-Rated Hoistway Door w/ Electric Strike - LH
 - Top Middle Bottom
- CPL042R-ES 42" Fire-Rated Hoistway Door w/ Electric Strike - RH
 - Top Middle Bottom

Landing Door Swing

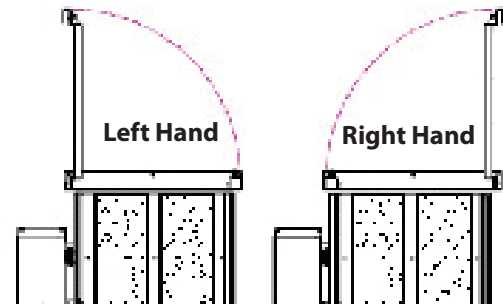

Electric Strike/Interlocks For Doors By Others

- CPL008WR - Wiring for Interlocks provided by others— Per Landing. Harmar only recommends Interlock by Honeywell (CDILBS1W and CDIRBS1W)
- CPL008L - EMI Interlock for Door/Gate —(Honeywell CDILBS1W) - LH
- CPL008R - EMI Interlock for Door/Gate Provided— (Honeywell CDIRBS1W) - RH
- CPL009L - Flush Mount Electric Strike for Doors by Others - LH Metal Wood
- CPL009R - Flush Mount Electric Strike for Doors by Others - RH Metal Wood
Please provide Door Jamb Material
- CPL016 - Keyed Dead Latch for use with Flush Mount Electric Strike - Each

Optional Equipment

- CPL022 - Pit Switch
- CPL026 - Float Level Switch
- CPL060 - Fascia Panel - Lift Height Required (10-14 day lead time - 41" wide) _____ Height in Feet (1" less than exact lift height)
- CPL075 - Phone Jack
- CPL076 - Emergency Light
- CPL062 - Tower Brace
- CPL078 - Auto Opener for Top Landing or Platform Gate QTY _____
- CPL079 - Auto Opener for Full Door QTY _____
- Express Deck (must submit additional form)
- VPL175* - Premium Finish-base unit (1st 4')
- VPL175-G* - Premium Finish-Gate
- VPL177* - Premium Finish-cost per foot Qty _____ (Over 4')
- VPL160* - Custom Color RAL Color # _____
(www.ralcolor.com)

*Additional lead time required.

DRAWING FOR APPROVAL

An application-specific drawing is requested and **production will be scheduled after return of signed approval drawing.**
Upcharge if lift is not ordered within 90 days of drawing submission.

DRAWING FOR PRESENTATION

An application-specific drawing is requested and **order will be scheduled immediately for production.**

Note - CPL units are shipped laying down. A lift gate is unable to be used on models 6' and taller. CPL units will require a loading dock or arrangements can be made to pick up at the terminal.

NOTES

ADDITIONAL INFORMATION

The product you are about to order will be carefully inspected at the factory to assure every component is correct and undamaged. It ships F.O.B. Missouri, meaning it becomes the property of the receiver upon leaving our factory. Therefore it is incumbent on you, the receiver, to carefully inspect the package to assure it has been delivered in good order and is undamaged.

Prior to signing for the shipment, inspect the package carefully.

VISIBLE DAMAGE: You must note any visible damage on the freight bill. If product damage is obvious, we recommend a further immediate inspection to see what other damage may be concealed, and this also must be written on the freight bill.

CONCEALED DAMAGE: If no damage was immediately evident, but is found later (within 48 hours), stop what you are doing and call the freight company immediately to report concealed damage.

Pictures of the damage are great support in any freight claim and are strongly recommended. Failure to take these steps may preclude your ability to be reimbursed for any damage in transit. We have personnel available to assist with this process Monday – Friday, 7:30am – 5:00pm EST by calling 800-833-0478.

On all VPL orders, Harmar will only warranty and support the Honeywell EMI part no. CDILBS1W or CDIRBS1W.

Thank you for your business!



I have read and understand the above:

Date: _____

Print Name: _____

Sign Name: _____

Harmar Vertical Platform Lifts are designed to meet ASME A18.1 Performance Safety Standards when properly equipped. While Harmar Vertical Platform Lifts meet national standards, it is imperative to check State and Local code requirements before installing to ensure compliance. All State and Local compliance is the responsibility of the purchaser. Some states may require fees for site preparation and permits. Harmar Vertical Platform Lifts should only be installed by a certified, professional Harmar installer. If the Vertical Platform Lift is installed by any other means, the purchaser and installer assume responsibility for issues that may arise involving improper installation.