

PINNACLE SL300

EVALUATION/ORDER FORM

Quote Order

Date: _____

Sales Representative: _____

Dealer Name: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: _____ Fax: _____

Email: _____

Shipping Method: Pick up Common Carrier

Account Number: _____

Projected Close Date: _____

Purchase Order Number: _____

Ship To Address: _____

Contact: _____

Phone: _____

Opportunity Reference / Project Name: _____

CONFIGURATION

QTY: _____ **SL300:** Standard 15'6" rail

QTY: _____ **SL300COS:** Standard 15'6" rail with chassis obstruction sensors

QTY: _____ **SL300FR-LH:** Left hand folding rail; 15'9" rail

QTY: _____ **SL300FR-RH:** Right hand folding rail; 15'9" rail

TRACK, PARTS AND OPTIONS

TRACK

QTY: _____ **SL600T3:** 3' mid-section assembly with brackets

QTY: _____ **SL600T5:** 5' mid-section assembly with brackets

QTY: _____ **SL600T8:** 7'9" mid-section assembly with brackets

SL600C: Custom cut* _____ feet in length (including overrun)

* Single unit orders only
Must include additional mid-section(s) above if total above 15'6".

PARTS AND OPTIONS

QTY: _____ **SL305:** Key lock on lift (chassis)

QTY: _____ **SL600SB1:** Additional short brackets

QTY: _____ **SL600TB1:** Additional tall brackets


QTY: _____ **SL600CC8:** 8' charger cord extension

QTY: _____ **SL300RET:** Retractable seat belt (dealer install)

QTY: _____ **SL600-MLT:** Manual lowering tool

QTY: _____ **SL300-L:** Left arm controls conversion (factory)

HOW TO MEASURE

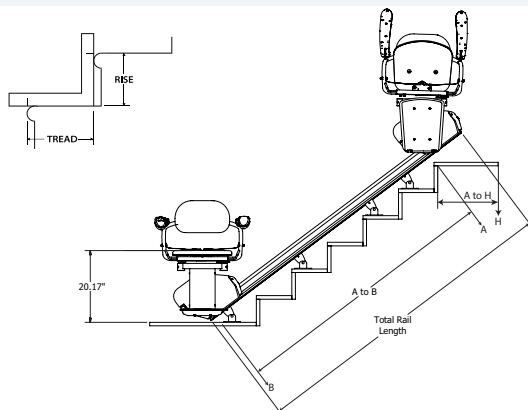

MEASUREMENTS

_____ **A to B:** Inches from top landing to bottom floor

_____ **A to H:** Inches from top landing to nearest obstruction (i.e. a door)

Rise _____ in. **Tread** _____ in. **Stair width** _____ in.

7" overrun recommended if top landing is clear (This is added to the A to B)

Note: You must order a Tall Bracket if **A to H is < 13"**.