

Date _____
 Sales Representative _____
 Name _____
 Address _____
 City _____ State _____ Zip _____
 Phone _____ Fax _____
 Email _____

Quote Order

Shipping Method:

Pick-up Common Carrier

Lift Gate Required

Model

- RPL400 (53" max)
- RPL600 (77" max)
- Exact Lifting Height _____ inches
(measured from top landing to floor)

Drive Power

- AC Power (Standard)
- DC Power CPL030 (Includes batteries)

Platforms

- Straight Through (Standard 36" x 48")
- RPL050 - 36" x 54" Platform
- CPL053 - 36" x 54" 90° Platform
- VPL3654 - 36" clear x 54" Platform

Controls

- PL016 - Call-Send Control (each)
Quantity _____
- PL017 - Wireless Call-Send Controls (pair)
- CPL015 - Key Lock Upgrade for Control
Quantity _____

Optional Equipment

- CPL060 - Fascia Panel - Lift Height Required
_____ Height in Feet (1" less than exact lift height)
(10-14 day lead time - 41" wide)
- CPL062 - Tower Brace
- Express Deck


Account Number _____
 Projected Close Date _____
 Purchase Order Number _____
 Ship To Address _____

Contact _____
 Phone _____
 Application: Residential - Single Family Home

Opportunity Reference / Project Name _____

Tower Orientation

- Left Hand Right Hand

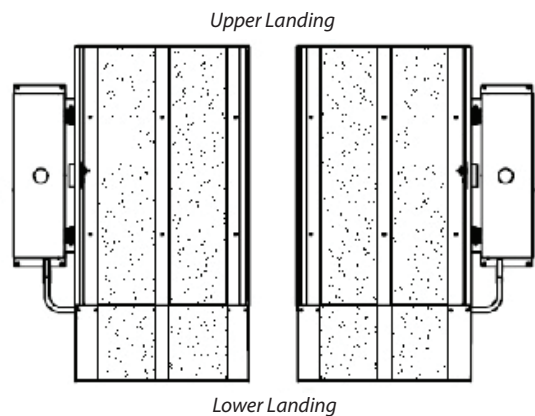

Power Supply

- 120v - 60 hz

- VPL175* - Premium Finish-base unit (1st 4')
- VPL175-G* - Premium Finish-Gate
- VPL177* - Premium Finish-cost per foot above base
Qty _____ (Above 4")
- VPL160* - Custom Color RAL Color # _____
(www.ralcolor.com)

*Additional lead time required.


Top Landing Gate

- CPL002L - Left-hand, 36" w/ EMI Interlock & Call/Send
- CPL002R - Right-hand, 36" w/ EMI Interlock & Call/Send
- CPL003L - Left-hand, 36" w/ EMI Interlock & No Call/Send
- CPL003R - Right-hand, 36" w/ EMI Interlock & No Call/Send
- CPL006L - Left-hand, 42" Wide Gate with EMI Interlock & Call /Send
- CPL006R - Right-hand, 42" Wide Gate with EMI Interlock & Call/Send
- CPL007L - Left-hand, 42" Wide Gate with EMI Interlock & No Call/Send
- CPL007R - Right-hand, 42" Wide Gate with EMI Interlock & No Call/Send

Interlocks for Gate/Door Provided By Others

- CPL008L - EMI Interlock For Gate/Door provided by others, Left-hand (Top landing only)
- CPL008R - EMI Interlock For Gate/Door provided by others, Right - hand (Top landing only)
- CPL008WR - Wiring only for interlock by others (top landing only)

Top Landing Gate/Door Swing

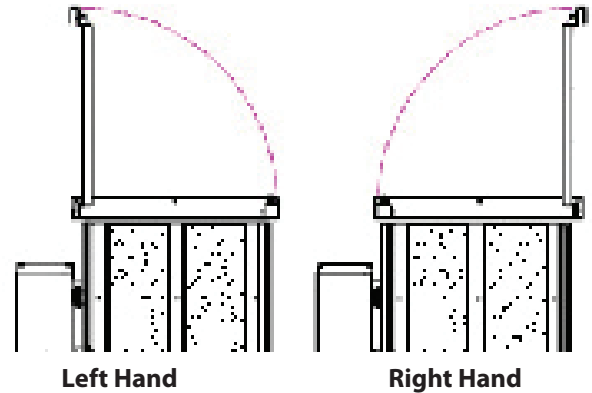

Drawings

DRAWING FOR APPROVAL

An application-specific drawing is requested and production will be scheduled after return of signed approval drawing. Upcharge if lift is not ordered within 90 days of drawing submission.

DRAWING FOR PRESENTATION

An application-specific drawing is requested and **order will be scheduled immediately for production.**

**A lift gate is unable to be used on models 6' and taller as they are shipped laying down. These units will require a loading dock or arrangements can be made to pick up at the terminal.*

Additional Information

The product you are about to order will be carefully inspected at the factory to assure every component is correct and undamaged. It ships F.O.B. Missouri, meaning it becomes the property of the receiver upon leaving our factory. Therefore it is incumbent on you, the receiver, to carefully inspect the package to assure it has been delivered in good order and is undamaged. Prior to signing for the shipment, inspect the package carefully.

VISIBLE DAMAGE: You must note any visible damage on the freight bill. If product damage is obvious, we recommend a further immediate inspection to see what other damage may be concealed, and this also must be written on the freight bill.

CONCEALED DAMAGE: If no damage was immediately evident, but is found later (within 48 hours), stop what you are doing and call the freight company immediately to report concealed damage.

Pictures of the damage are great support in any freight claim and are strongly recommended. Failure to take these steps may preclude your ability to be reimbursed for any damage in transit. We have personnel available to assist with this process Monday – Friday, 7:30 am – 5:00 pm CST by calling 800-833-0478.

On all VPL orders Harmar will only warranty and support a Harmar provided electromechanical interlock.

Thank you for your business!

I have read and understand the above:

Date: _____

Print Name: _____

Sign Name: _____

Harmer Vertical Platform Lifts are designed to meet ASME A18.1 Performance Safety Standards when properly equipped. While Harmer Vertical Platform Lifts meet national standards, it is imperative to check State and Local code requirements before installing to ensure compliance. All State and Local compliance is the responsibility of the purchaser. Some states may require fees for site preparation and permits. Harmer Vertical Platform Lifts should only be installed by a certified, professional Harmer installer. If the Vertical Platform Lift is installed by any other means, the purchaser and installer assume responsibility for issues that may arise involving improper installation.